



Serinus[®] 40

Oxides of Nitrogen Analyzer

The Serinus[®] 40* Oxides of Nitrogen (NO_x) analyzer delivers precise and reliable performance at excellent value.

It uses proven chemiluminescence technology to measure NO, NO₂ and NO_x in ambient air (LDL < 0.4 ppb, range 0 to 20 ppm).

* Acoem Serinus 40 formerly known as Ecotech Serinus 40.

Approvals

- US EPA approval (RFNA-0809-186)
- EN approval TÜV (0000040204 -02)
- Australian Standard (AS 3580.5.1-2011)
- Russian approval (56263-14)
- French approval LSCQA
- Ukraine approval (12/3/B/24/295-17)
- Chinese Pattern Approval (JJF1361-2012)
- Korean approval NIER (AACMS-2017-01)


Benefits

The Serinus® range of analyzers have been designed using our experience & knowledge gained from operating large air quality monitoring networks for more than 45 years. The result, instruments that integrate seamlessly into continuous monitoring networks.

- Reliable performance complemented with a two year warranty
- Minimise time spent on site performing maintenance through superior remote instrument control, diagnostic viewing & calibration
- Comprehensive data logging & remote viewing of over 200 operational parameters
- Versatile interfacing through RS232, analog & digital I/O & optional TCP/IP & Bluetooth
- Easy setup through an intuitive menu system, advanced GUI & a large alphanumeric keypad with tactile keys
- Instant status indication via illuminated instrument status light buttons on the front panel
- Removable flash memory stores ~ 10 years of data, including up to 12 individual parameters & event logs. Operational parameters can also be transferred to memory for easy retrieval
- Latest firmware updates can easily be installed using the USB flash memory drive
- Programming, viewing, downloading & emailing of data is made even simpler using optional Bluetooth connectivity combined with the Serinus Remote Android App
- Built-in digital display measuring values & having function of measuring values transferred to graphical trend display
- Enhanced operator safety through the use of 12 VDC internal voltages
- Reduced cost of spare parts, accessories & consumable items through extensive use of standard components across the Serinus range
- Rack slide design makes accessing internal components & removing the analyzer from a rack cabinet easy
- AQMS power usage can be reduced due to the instrument's low power demand & its ability to operate over a wide temperature range.

Specifications

Range:	0 – 20 ppm (autoranging)
Concentration units:	mg/m ³ , µg/ m ³ , ng/m ³ , ppm, ppb or ppt
Noise:	< 0.2 ppb
Lower detectable limit:	< 0.4 ppb
Linearity:	± 1 % of full scale
Precision:	0.4 ppb or 0.5 % of reading, whichever is greater
Zero drift:	24 hours: < 0.5 ppb, 7 days: < 0.5 ppb
Span drift:	7 days: < 1 % of reading or 0.5 ppb whichever is greater
Response time:	15 seconds to 95 %
STP reference:	0 °C, 20 °C, 25 °C at 101.3 kPa
Sample flow rate:	600 cc/min (total for 2 channels)
Temperature range:	0 – 40 °C
Power:	100 – 240 VAC, 50 – 60 Hz (autoranging)
Power consumption:	265 VA (max at start-up), 190 VA (nominal) 150 VA (nominal)
Dimensions:	429 x 175 x 638 mm
Rack Spacing:	3.5 RU
Weight:	21.9 kg

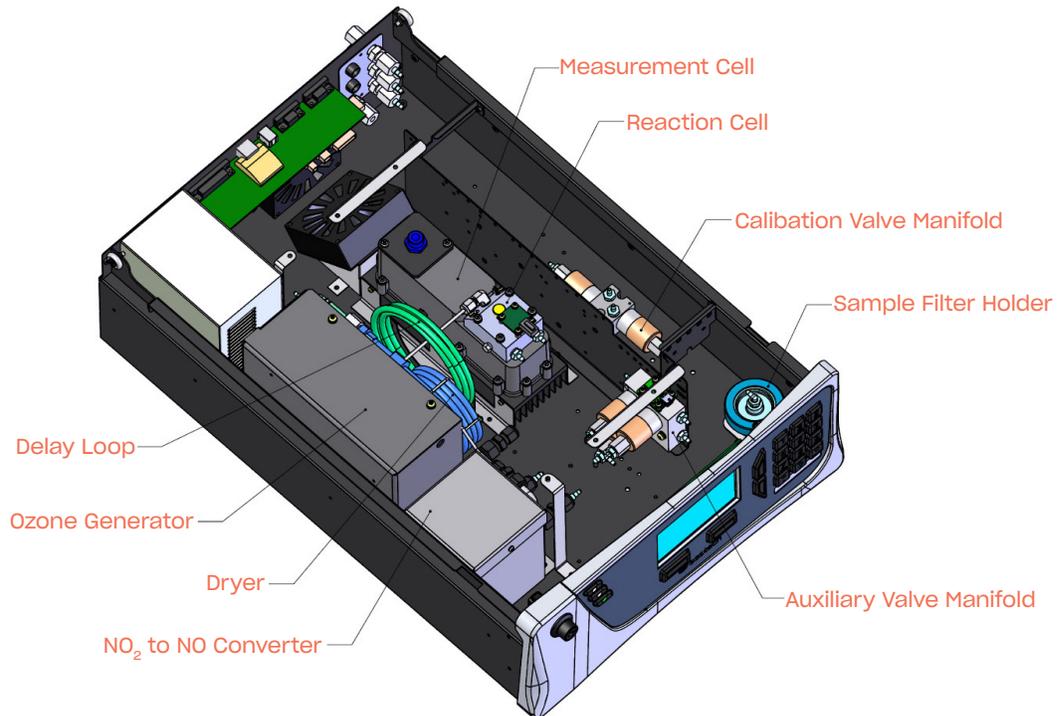

Communication

- #1 RS232 port (supports all protocols*)
- #2 RS232 port (supports all protocols* & multidrop)
- USB port (Advanced protocol only)
- Bluetooth (Advanced protocol only)
- TCP/IP network port (optional, supports all protocols*).

* Available protocols: Modbus (RTU/TCP), Bayern Hessen, EC9800 or Advanced

Communication analog & digital I/O port

- 3 x analog outputs (current or voltage), 12 bit resolution user definable range (between two user specified points)
Current range: 0 – 20 mA, 2 – 20 mA or 4 – 20 mA
Voltage range: 0 – 5 V, 0 – 10 V (voltage offset of 0 V, 0.25 V or 0.5 V)
- 3 x analog inputs (scalable), 0 – 5 V, 16 bit resolution
- 8 x logic level digital control inputs
- 8 x open collector digital status outputs.

Data logging

- 8 GB removable USB flash memory drive that stores the internal data logger, event log, automatic/manual configuration backup & automatic/manual parameter list save
- Internal data logger (can log up to 12 of 200+ parameters)
- Logger interval (1 second to 24 hours)
- Storage capacity ~ 10 years (set to 1 minute interval).

Options & accessories

- Internal Sample Dryer
- TCP/IP Network Port
- Bluetooth
- Dual Sample (particulate) Filter
- High Pressure Span (for direct cylinder calibration)
- High Pressure Zero (for direct cylinder calibration)
- Test Lamp (for PMT diagnostics)
- Metric Fitting Kit (to connect 6 mm tube to rear ports)
- 19" Rack Mount Kit
- External Pump (240 or 110 VAC)
- External Charcoal Scrubber
- Annual Maintenance Kit
- High Level Option
- Printed User Manual (a soft copy of the user manual is supplied on USB with each analyzer).

